

RPLT-7200K LED LIGHTING TOWER



SPECIFICATIONS

ENGINE 1

Type
Engine Power (kW)
RPM
Fuel Consumption (L/h)

KUBOTA Z482 DIESEL

Vertical 2-cylinder in-line water cooled
4
2600
0.88 - 0.98 (subject to environment)

ENGINE 2

Type
Engine Power (kW)
RPM
Fuel Consumption (L/h)

KUBOTA D905 DIESEL

Vertical 3-cylinder in-line liquid cooled
6
1500
1.1

ALTERNATOR

Model
Rated Power

SD 16B/4-pole brushless
5.5kW

LIGHT FEATURES

Light (W)
Luminous Flux (lm)
Longevity (hrs)

LED 6 x 480
6 x 36000
20000

MAST FEATURES

Max. Erection Height (m)
Hydraulic Rotation
Operation Type

11
350 non-continuous
Hydraulic


DIMENSIONS AND WEIGHT

Dimensions (L x W x H) (mm)
Weight (kg)

3340 x 1900 x 2430
1950

STANDARD EQUIPMENT

- 48 Volt DC
- 6 x 480W LED lights 3 years warranty
- 270L plastic fuel tank – lower fuel consumption 0.88L/h (up to 38 day runtime, based on 8 hour shifts)
- SMS remote reporting – GPS option
- Control panel - state of the art
- Full hydraulic tower lift and rotation
- Heavy-duty trailer construction, dual-axle 4 x 16 inch tyres
- 4 hydraulic stabiliser legs
- Cable track for wiring protection
- IP65 rated for all lights and control box
- Battery isolator
- Emergency stop

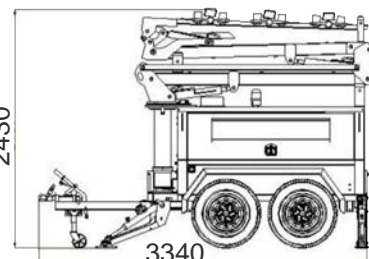

REMOTE PROJECT SPECIALISTS
SAFER. GREENER. SMARTER SOLUTIONS.

LIGHT LUX CHART

